




Samsung Galaxy Tab 3 8.0 Speakers Replacement

Speakers can go bad if water get in them, too much heat, or excessive use.

Written By: Kyle Ballard

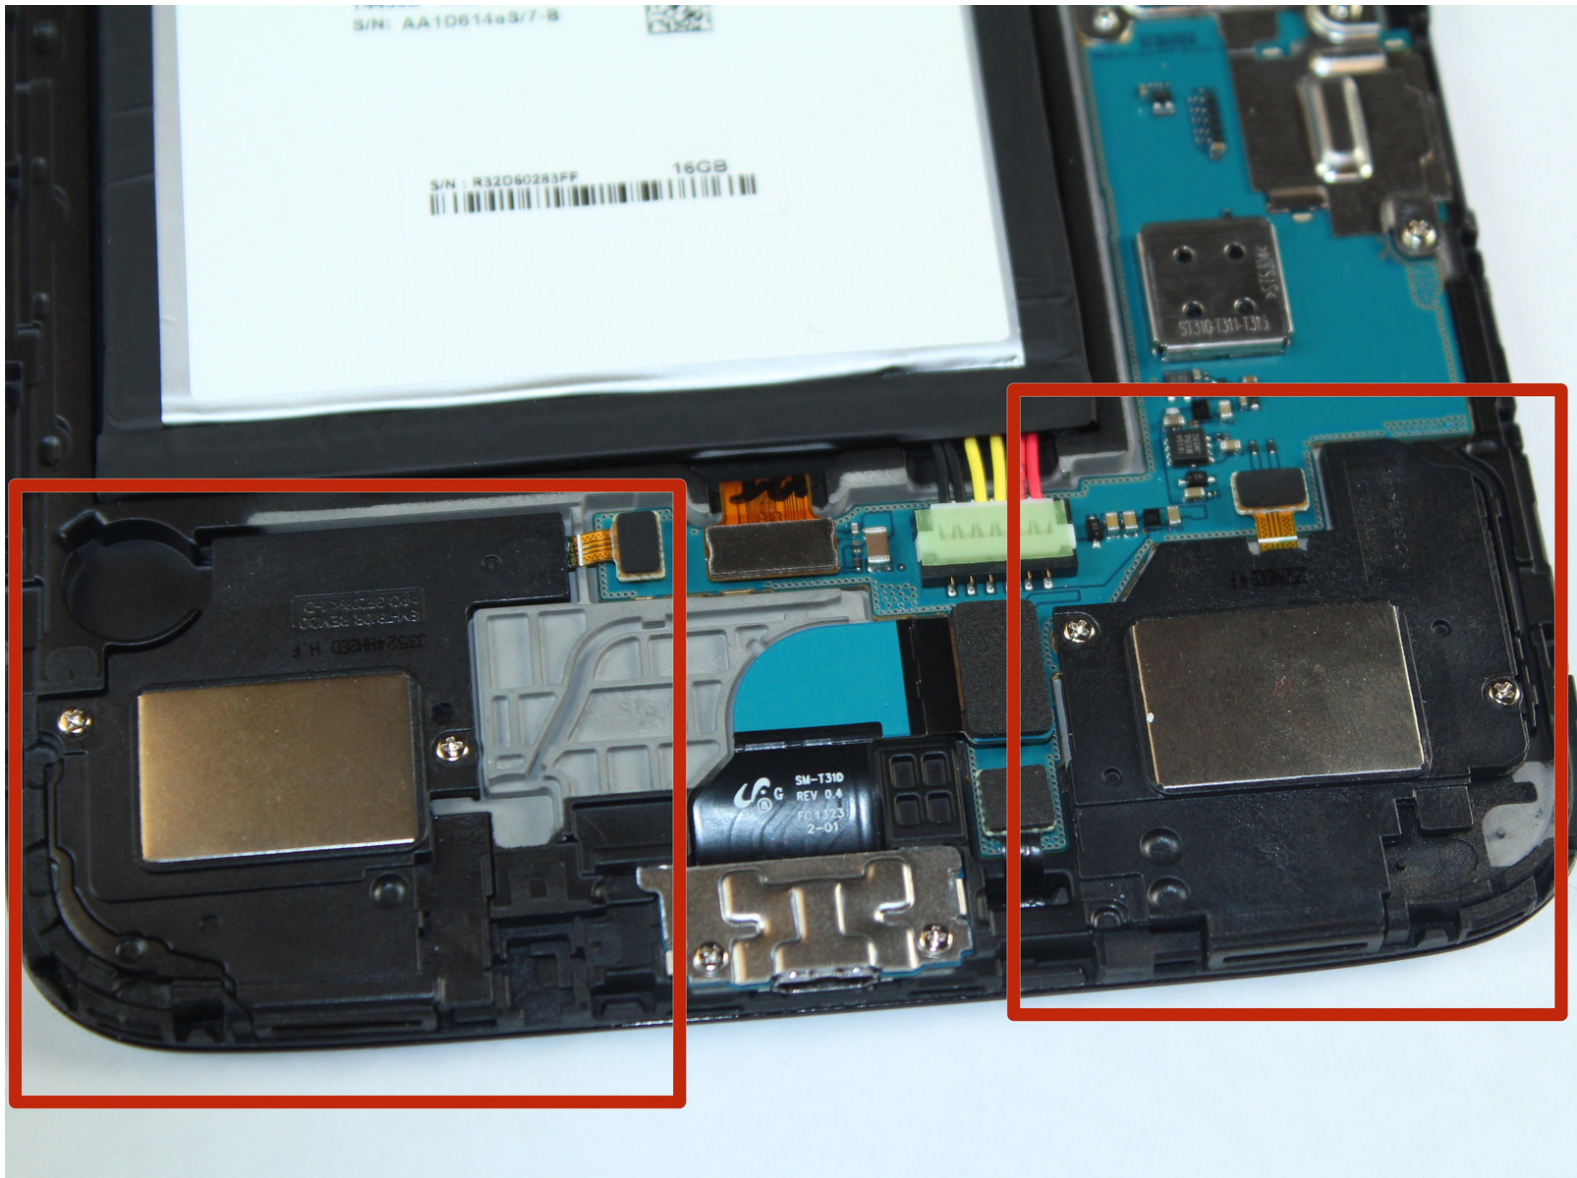



TOOLS:



- [iFixit Opening Tools](#) (1)
- [Tweezers](#) (1)
- [Phillips #000 Screwdriver](#) (1)



PARTS:



- [Samsung Galaxy Tab 3 8" Right Speaker](#) (1)
- [Samsung Galaxy Tab 3 8" Left Speaker](#) (1)

Step 1 — Battery - Open up the tablet

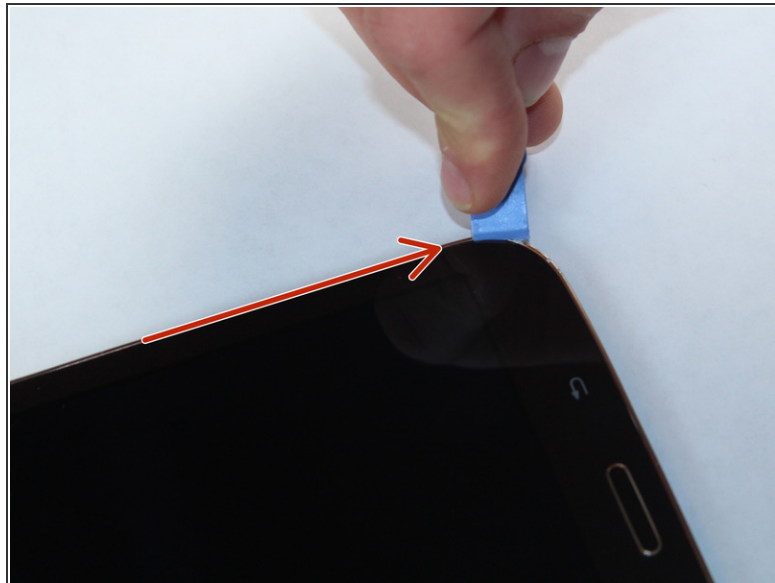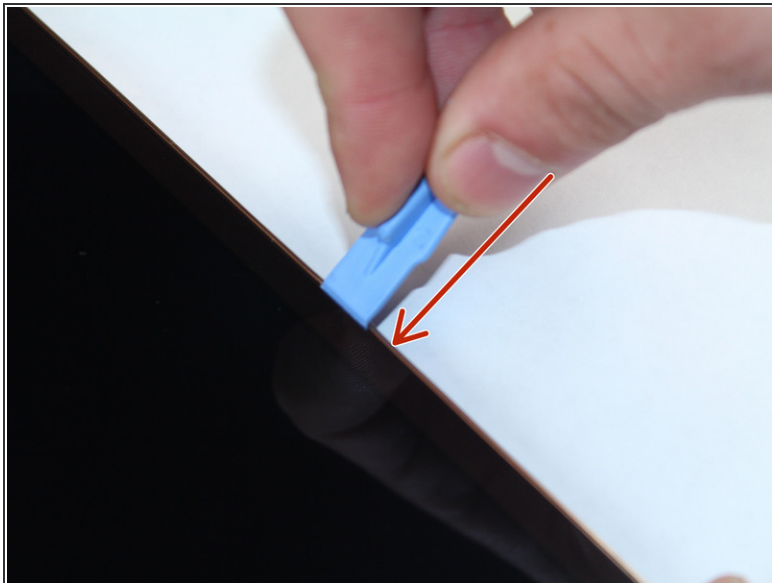



- Start out by separating the screen from the back cover using the larger plastic opening tool to pry them apart.

Step 2 — Remove Back Cover

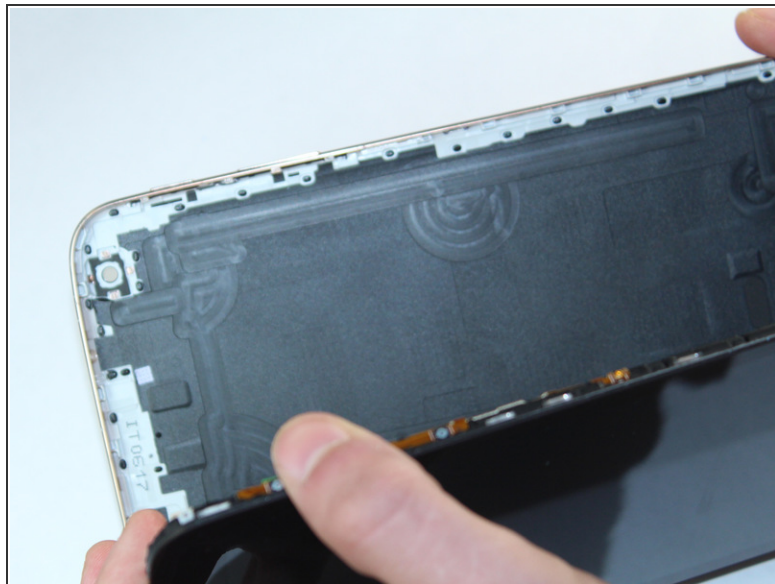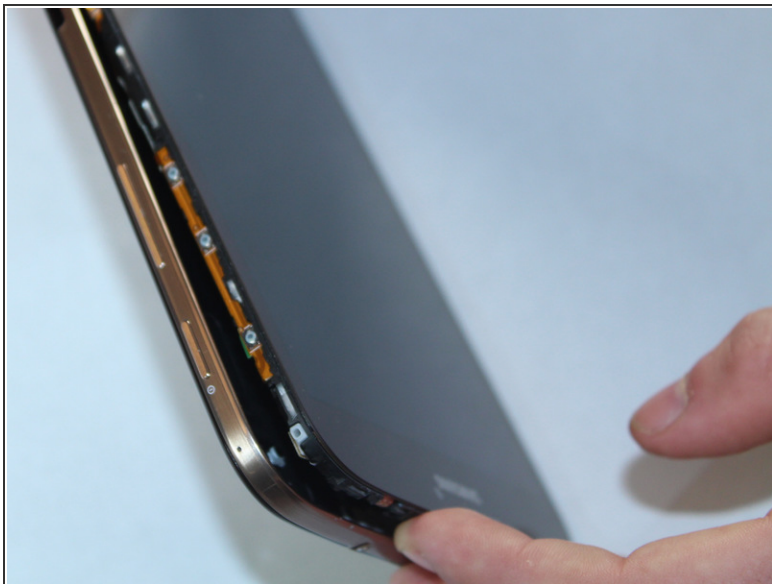


- Once every part of the screen is separated from the back cover, you should be able to fully remove it with your hands.

Step 3 — Disconnect Battery

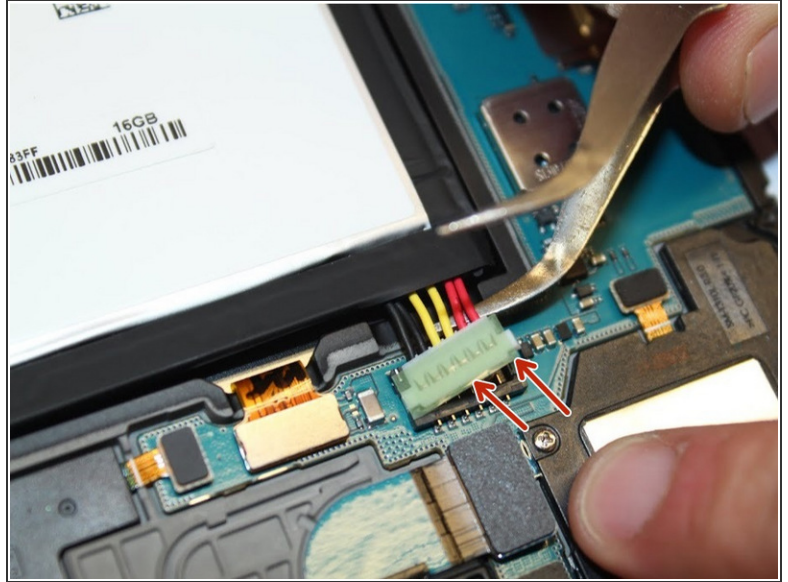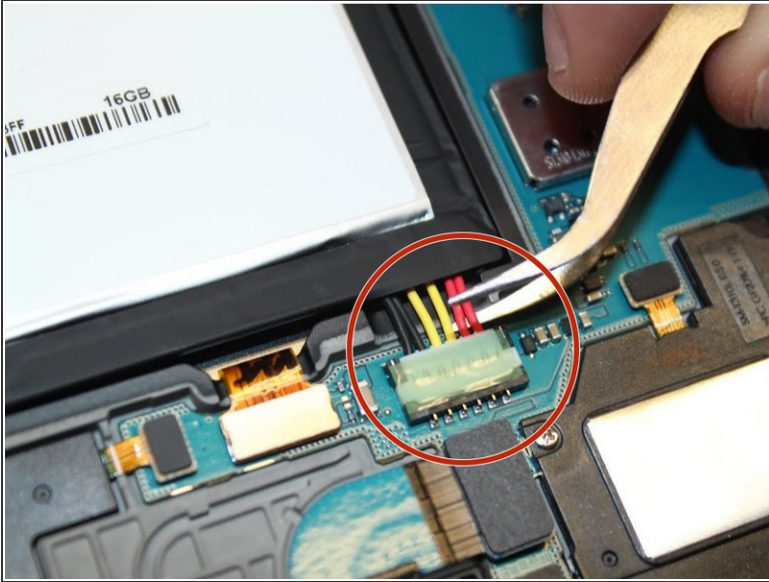

- To remove the battery you must use something small, such as tweezers, to disconnect the battery from its port.


 Note: the connection lifts up to remove

Step 4 — Remove Battery




- After the battery is disconnected you may use your hands to pull out the battery. It may be a little difficult because there is adhesive on the backside of the battery.

Step 5 — Disconnect Speakers

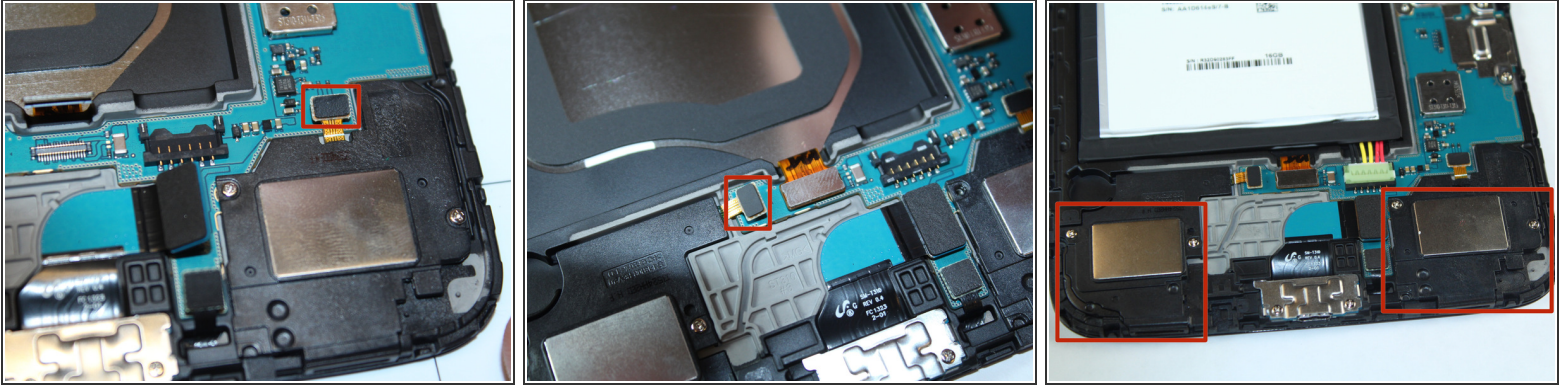

- Disconnect the relays attached to the motherboard.

Step 6 — Unscrew Speakers

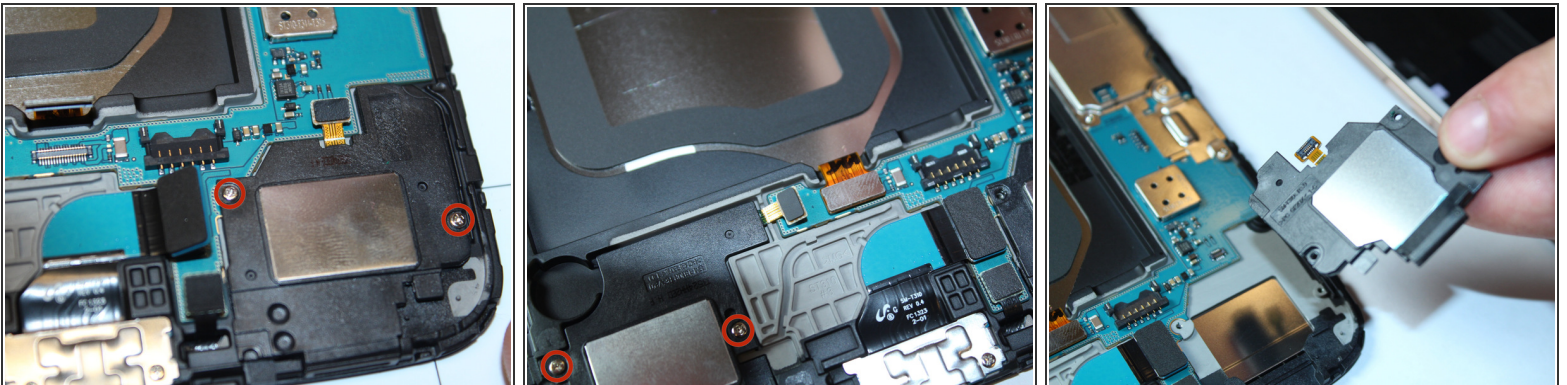

- Unscrew the 2.9mm screws from the speakers using a Phillips head #000 screwdriver, then lift the speakers from the device.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-18 04:13:32 PM.